



CERTIFICATE




SPECIFICATION

System Name	MetaGround-Steel-PHC Mounting System
Ground Type	MAC/HDG Steel/AL
Tilt Angle	Up to 60°
Wind Load	Up to 90m/s
Snow Load	Up to 50cm
Applicable Solar Module	Framed/Frameless
Panel Layout	Portrait/Landscape
Design Standard	BS EN, ASCE7-10, BS 6399, AS-NZS 1170, GB 50009-2012, MS 1553, NSCP
Material	MAC/ HDG Steel , AL-6005-T6, SUS304
Color	Sliver/Black
Warranty	10-year

FEATURE

1. Self-healing. MAC steel could be adopted as the main material to form a stable and cost-effective design.
2. Save installation time and labor cost. Simple structure and prefabricated PHC Pipe Pile save installation time and labor costs.
3. Against floods. High PHC Pipe Pile against the floods.

INSTALLATION

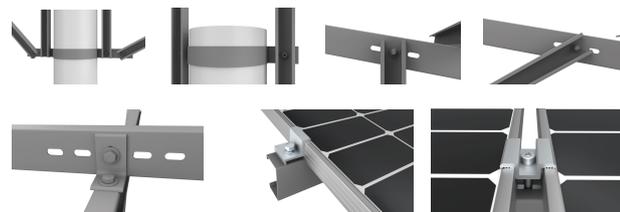

COMPONENT

- | | | | | | |
|----------|--|---------------|----------|--|--------------|
| 1 | | Beam | 7 | | Mid Clamp |
| 2 | | Inclined Beam | 8 | | Beam Support |
| 3 | | Post | | | |
| 4 | | Side Support | | | |
| 5 | | Hoop | | | |
| 6 | | End Clamp | | | |